

AC-44




Unified Communications

Spec Sheet

Type:	USB powered mic
Capsule:	Three Capsule Boundary Design
Power:	USB bus/cable
Frequency Response:	30Hz – 20kHz
Sample Rate:	48k
USB Compatibility:	USB 1.1 and 2.0
Size:	3 in. x 2.5 in. x 1 in.
A/D Converter:	16-bit Delta Sigma with THD+N - 0.01%
Coverage:	Boundary design with 180-degree pickup

Pickup Pattern:	180 Degree pickup
Signal to Noise Ratio:	91db
THD:	-85dB
Bit Depth:	24Bit
USB Format:	USB 2.0, type C connector
USB Output:	Type-C
Analog Output:	3.5mm Line Level Direct Feed
Cable:	6' USB Type C to USB Type A

Dimensions

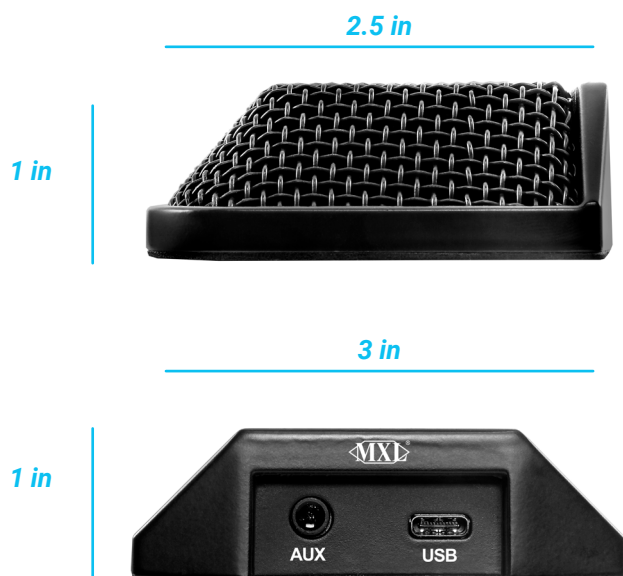

Accessories



USB Cable



Microfiber Cleaning cloth



www.mxlmics.com

support.mxlmics.com